



Garden Hose

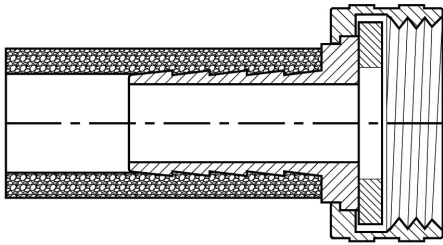

MATERIALS:

CA360, CA345, CA377

VIBRATION RESISTANCE:

Good

WORKING PRESSURE:

150 PSI Maximum based on hose size.
ALWAYS consult hose specifications

TEMPERATURE RANGE:

35 to +100°F
2 to +38°C

CONFORMANCE:

ALWAYS consult hose and/or tubing specifications for media compatibility, pressure and temperature ratings.

APPLICATIONS:

Garden hose applications which do not exceed 150 PSI including water, irrigation, car wash and piping systems.

HOW TO ORDER:

- Order as complete assemblies or individual components by part number.
- Some items available on Special Order basis only.

NOMENCLATURE:

P-19A-12D

- 19A: Fitting Configuration
- 12: Hose Size in sixteenths ($12/16 = 3/4$)
- D: Pipe Size 1/2"

Dimensions subject to change without notice.

BENEFIT:

- No equipment investment required.
- Reduces the number of SKU's required to cover needs.

FEATURE:

- Field attachable hose ends.
- Attach with clamps or ferrules.

ADVANTAGE:

- No assembly equipment required.
- Applicable in wider range of applications.
- Conforms to more customers' requirements.

ASSEMBLY INSTRUCTIONS:

- Cut hose squarely and remove burrs.
- Slide ferrule or hose clamp onto hose.
- Insert hose barb into hose until hose bottoms against fitting hex.
- Tighten clamp or crimp ferrule per manufacturer's specifications.
- Install rubber washer in all female hose ends.