


## Pipe

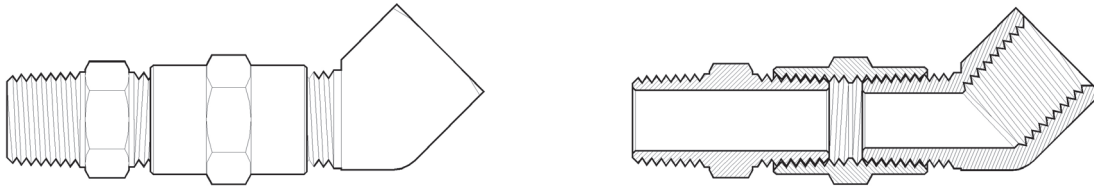

Tube O.D.	1/8	1/4	3/8	1/2	3/4	1
Thread Size	1/8-27	1/4-18	3/8-18	1/2-14	3/4-14	1-11 1/2

### MATERIALS:

CA360, CA345, CA377

### VIBRATION RESISTANCE:

Fair

### WORKING PRESSURE:

1,200 PSI Maximum based on size.  
ALWAYS consult tubing/pipe specifications.

### TEMPERATURE RANGE:

-65 to +250°F  
-54 to +121°C

### CONFORMANCE:

Meets functional requirements of SAE as indicated by configuration.

### APPLICATIONS:

Air, oil, water, hydraulic fluid, lubricant and other applications which use brass, copper, and iron pipe.

### HOW TO ORDER:

- Item specific notes indicated throughout.
- Some items available on Special Order basis only.

### NOMENCLATURE:

P-100A-A

- 100A: Fitting Configuration
- A: Pipe Size 1/8"
- Dimensions subject to change without notice.
- Contained in nomenclature indicates extruded style.

### BENEFIT:

- Lowers costs based on fewer vendors.
- Reduces maintenance costs and unsightly leaks.
- More sales opportunities.

### FEATURE:

- Wide range of sizes and styles.
- Extruded and Forged available.

### ADVANTAGE:

- One-stop shop for all needs.
- Fewer leaks in the system.
- Conforms to more customers' requirements.

### ASSEMBLY INSTRUCTIONS:

- Tighten male to female, finger tight.
- Tighten with a wrench as follows:  
1/8" - 1/2"    2 Additional Turns  
3/4" +        2-1/2 Additional Turns

**DO NOT OVER TIGHTEN OR TUBING MAY SPLIT**